


General

Toplayer	Thickness: 2mm (5/64 inch)
Dimensions	Length: 1185mm (46-5/8 inch)
	Width: 148mm (6 inch)
	Thickness: 10mm (3/8 inch)
Core	High Density Fibreboard (HDF)
Bevels	4 bevels (0.5mm)
Gloss	Matt (10)
Structure	Brushed
Backing	Real wood
Density	>850kg/m ³
Weight/sqm	8kg
Connection system	Unifit X
Installation type	Floating
Standard colors	<u>Oaks</u> : Essence, Ivory, Desert, Silk Oak
	<u>Walnuts</u> : Smoked Walnut

Product composition

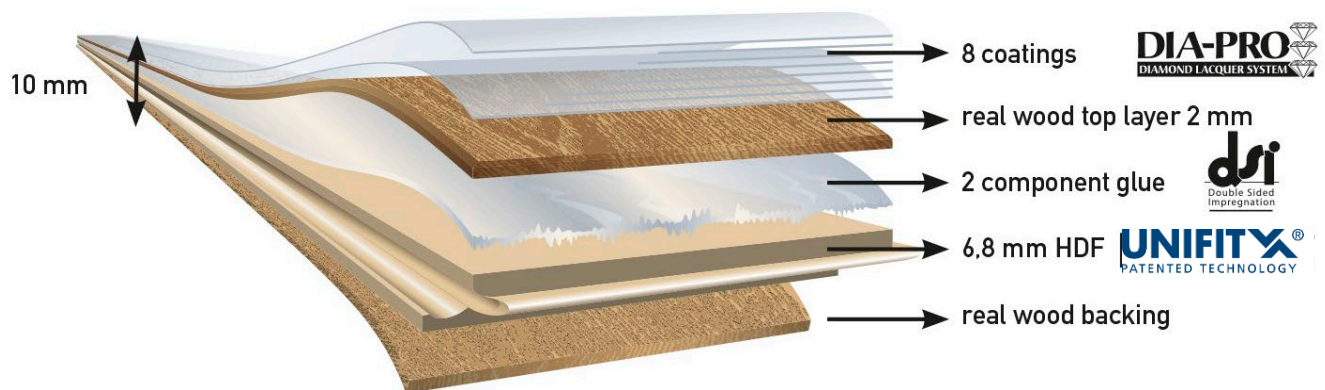

Technical specifications

Domestic Usage Classification	22
Commercial Usage Classification	31
CE Certification	EN14342:2005+A1:2008
Warranty years	Residential use: 15 years - low commercial use: 5
Formaldehyde Emission	E1
PCP	PCP free
Underfloor heating	ok but glued
Thermal resistance	0,07m ² K/W
Thermal conduction	0,14W/mK
Fire reaction & smoke generation	Dfl-s1
Maintenance	Weekly cleaning with 'Parky wood floor cleaner'

Packaging

Box	9 boards Surface 1,578m ² (17 sq.ft) Gross Weight 13,5kg (30 lbs)
Pallet	66 boxes Surface 104,15m ² (1121 sq.ft) Gross weight 910kg (2006 lbs)

