


## General

Top layer	Thickness: 0.6mm (1/32 inch)
Dimensions	Length: 1203mm (47 3/8 inch)
	Width: 190mm (7 1/2 inch)
	Thickness: 7.2mm (9/32 inch)
Core	High Density Fibreboard (HDF)
Bevel	4 bevels (0.5mm)
Gloss	Super Matt (3)
Structure	Brushed
Backing	Real Wood
Density	>900kg/m <sup>3</sup>
Weight/sqm	7kg
Connection System	Uniclic
Installation type	Floating
Standard Colors	<u>Oaks</u> : European, Ivory, Umber, Milk, Desert, Manhattan, Antique, Chocolate, Crystal Oak
	<u>Walnuts</u> : Smoked Walnut

## Product composition

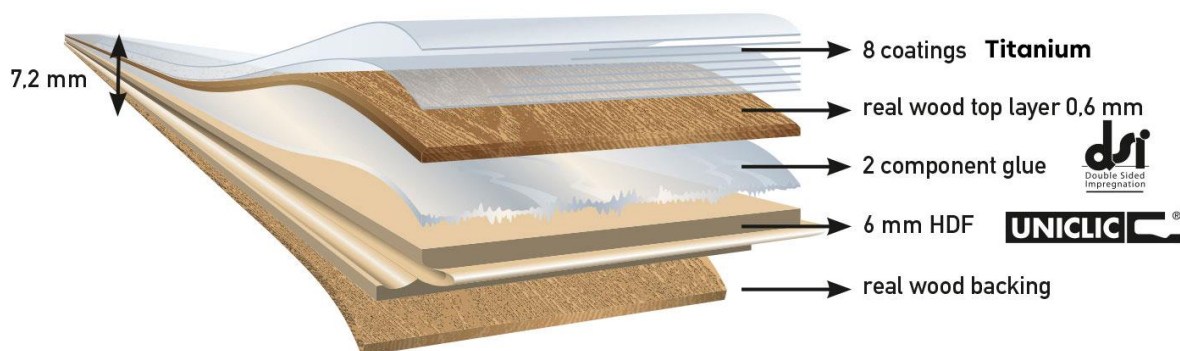

## Technical specifications

Domestic Usage Classification	23
Commercial Usage Classification	31
CE Certification	EN14342:2013
Warranty years	Residential use: 15 years - low commercial use: 5
Formaldehyde Emission	E1
PCP	PCP free
Underfloor heating	High suitability, with a thermal resistance of 0.053m <sup>2</sup> K/W there is a minimal waste of energy.
Thermal resistance	0,053m <sup>2</sup> K/W
Thermal conduction	0,14W/mK
Fire reaction & smoke generation	Cfl-s1
Maintenance	Weekly cleaning with 'Parky wood floor cleaner'

## Packaging

Box	11 boards Surface 2,514m <sup>2</sup> (27.06 sq.ft) Gross weight 16,3kg (36 lbs)
Pallet	65 boxes Surface 163,41m <sup>2</sup> (1759 sq.ft) Gross weight 1073,5kg (2367 lbs)

